



Fibre Management

2U/3U Sliding Patch Panel



Linxcom High Density Sliding Patch Panel is of a modular design and offers excellent quality and superior functionality.

Available in 2U and 3U models, these panels slide out at both 180 and 45 degrees.

The front frame is exchangeable so one chassis can hold a variety of fibre optic adapters such as SC duplex and simplex, LC duplex and quad, E2000 and ST/FC Simplex.

Features & Benefits

- Precise dimensions and craftsmanship
- Easy to use opening/closing fasteners
- Removable and exchangeable front frame
- Removable cassette holder
- Adjustable brackets for a fully recessed panel
- 180° or 45° open working angle for easy access
- Individually labelled ports
- High quality laser cut and powder paint, available in 3 colours: RAL 7035, 7021 and 9005
- Built-in strength member tie positions
- High density; holds up to 96 ports in 3U and 72 ports in 2U
- Available loaded with adapters, pigtails, and more



Up to 192
Fibres



IP20
Rated



Rack
Mountable

Technical Specifications

U Size	2U (88.8mm) or 3U (133.2mm)
Width	433mm
Depth	245mm
Net Weight	2.90kgs (2U) or 3.45kgs (3U)
Packaged Weight	3.20kgs (2U) or 3.9kgs (3U)
Packaged Dimensions	530(w) * 100(h) * 310(d) mm (2U) or 530(w) * 135(h) * 310(d) mm (3U)
IP Rating	20
Cable Entries	6x 22mm (additional knock-out plates and small entries)
Mounting Adjustment Range	55mm
Material	1.2mm Cold Rolled Steel
Material Coating	Powder
Colour	RAL 7035, 7021 or 9004
Operating Temperature	-40°C to +50°C
Accordance	TIA/EIA 568.C, ISO/IEC 11801, ENS50173, IEC60304, IEC61754, EN297-1
Compliant	RoHS, Reach/SVHC



Fibre Management

2U/3U Sliding Patch Panel

Available Configurations

Capacity (U)	Adapter Type	Duplex/Simplex	Fibre Type	Ports	No of Adapters
2U	SC (LC)	Duplex (Quad)	Singlemode, Multimode, Empty	48	1-48
3U	SC (LC)	Duplex (Quad)	Singlemode, Multimode, Empty	72	1-72
2U	FC/ST or SC/E2000	Simplex	Singlemode, Multimode, Empty	72	1-72
3U	FC/ST or SC/E2000	Simplex	Singlemode, Multimode, Empty	96	1-96

Ordering Information

Using the available configurations amend/create product codes using the formula below.

Height		Adapter Type		Fibre Type	
2U	2U	FC (Simplex Only)	FC	Unloaded	EM
3U	3U	ST (Simplex Only)	ST	Singlemode Loaded	SM
		SC	SC	Multimode Loaded	MM
		LC	LC	Singlemode APC Loaded	SMA
		E2000	E2		


3U	SPP	SC	SX	EM	96
----	-----	----	----	----	----

Panel Style	Simplex / Duplex / Quad	Port Density
Sliding Patch Panel SPP	Simplex SX Duplex DX Quad (LC Only) QD	1-96 Ports 01-96

Example: **3USPPSCSXEM96** - Unloaded 3U SC Simplex 96 Port High Density Sliding Patch Panel

Exchangeable Front Frames

Front frames are available separately and can be exchanged with any existing front frame on our universal chassis.

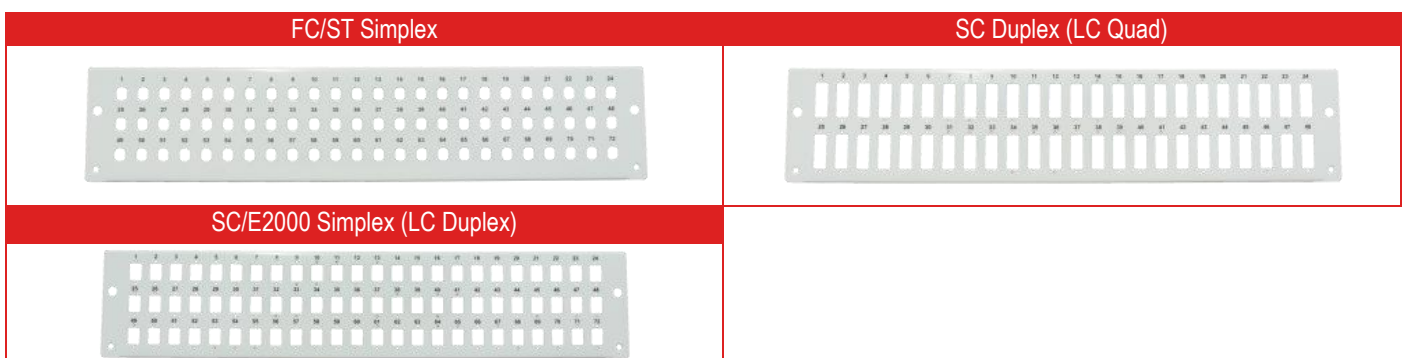



Fibre Management

2U/3U Sliding Patch Panel

Product Code	Description
2USCDXFF48	2U SC Duplex (LC Quad) Front Frame - 48 Port
3USCDXFF72	3U SC Duplex (LC Quad) Front Frame - 72 Port
2USCSXFF72	2U SC/E2000 Simplex (LC Duplex) Front Frame - 72 Port
3USCSXFF96	3U SC/E2000 Simplex (LC Duplex) Front Frame - 96 Port
2UFCSXFF72	2U FC/ST Simplex Front Frame - 72 Port
3UFCSXFF96	3U FC/ST Simplex Front Frame - 96 Port

For any queries, please contact the Linxcom team using the details below.