



NETWORKING & TELECOMMUNICATIONS END-TO-END SOLUTIONS


FIBRE OPTIC CABLE

# **DROP CABLE**

# **Bow Type**

## **PRODUCT SPECIFICATIONS**

Linxcom Indoor Drop Cable uses a bow type flat surface. The fibre optic cable is placed in the centre of the cable. This cable has two strength members placed at each side to strengthen it.

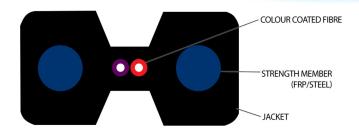

# **APPLICATIONS**


- Internal/external duct
- Direct
- Access Network

## **FEATURES**

## **BENEFITS**

- 2 -4 Core
- Light weight and high practicability
- Flame Retardant
  - Durable and High Quality
  - Strength Member

JACKET SPECIFICATIONS	
Material	LSZH
Colour	Black
Outer Diameter	$(2.0\pm0.1)\times(3.0\pm0.1)$
Rip Cord	
Tensile Strength	150 - 250N
Crush Resistance	220 N/10cm
	100 N/10cm
Bending Radius	12/30mm



ENVIRONMENTAL SPECIFICATIONS	
Operation (°C)	-40 ~+60
Installation (°C)	-40 ~+60