




## FIBRE OPTIC CABLE

# DROP CABLE

# FRP

### PRODUCT SPECIFICATIONS

Linxcom Indoor Drop Cable uses a Fiberglass-Reinforced Plastic type surface. The fibre optic cable is placed in the centre of the cable. This cable has two strength members placed at each side to strengthen it.

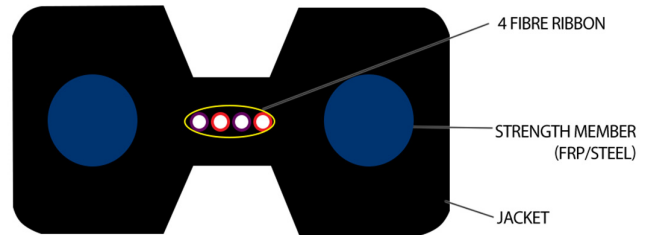

### APPLICATIONS


- Internal/external duct
- Direct
- Access Network

### FEATURES

- 1-4 Core
- Light weight and high practicability

### BENEFITS

- Flame Retardant
- Durable and High Quality
- Strength Member



### JACKET SPECIFICATIONS

Material	LSZH
Colour	Black
Outer Diameter	(2.0±0.2) x (3.0±0.2)
Rip Cord	--
Tensile Strength	80 - 40N
Crush Resistance	1000 N/cm 500 N/cm
Bending Radius	60/50mm

### CONSTRUCTION SPECIFICATIONS

Fibre Count	2-4
Fibre Type	G.6527
Fibres Per Tube	FRP $\phi$ 0.58 ± 0.05mm
Weight (kg)	8/km

### ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40 ~+60
Installation (°C)	-40 ~+60