




FIBRE OPTIC CABLE

FIGURE 8 CABLE

PRODUCT SPECIFICATIONS

Linxcom Figure 8 Outdoor Aerial cable contain central loose tubes with a jelly compound inside to protect the cladding fibre, it also consists of corrugated steel tape armour laminated with plastic at both sides and bonding to a PE sheath.

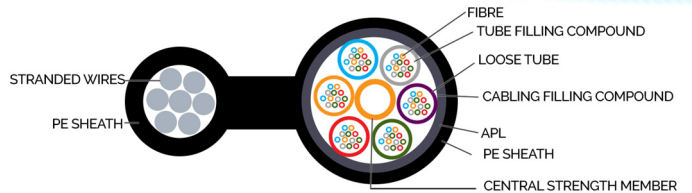

APPLICATIONS

- Horizontal wiring in LAN
- Aerial



FEATURES

- 1 -144 Core
- High Tensile Strength

BENEFITS

- Flame Retardant
- Durable and High Quality

JACKET SPECIFICATIONS

Material	PE
Colour	Black
Outer Diameter	9.5x17mm
Rip Cord	--
Tensile Strength	1500 N Long 6000N Short
Crush Resistance	300N Long 1000N Short
Bending Radius	10D Long 20D Short

CONSTRUCTION SPECIFICATIONS

Fibre Count	--
Armour Layer	Steel Tape
Strength Member	Steel
Messenger Wire	3.0
Weight	200kg/km

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+60
Installation (°C)	-40~+60

ORDERING INFORMATION

Part Number	Construction	Fibre Type	Jacket
F8	1C,2C,4,6C,8C,12C,24C,48C,72C,96C,120C,144C	SM1, SM2, MM1, MM2, MM3,MM4	PE LSZH