



## FIBRE MANAGEMENT

# DOME ENCLOSURE

# DER01

### PRODUCT SPECIFICATIONS

Linxcom model DER01 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

### APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




### FEATURES

- HQ Polypropylene
- Up to 60F
- Adjustable Cassettes

### BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

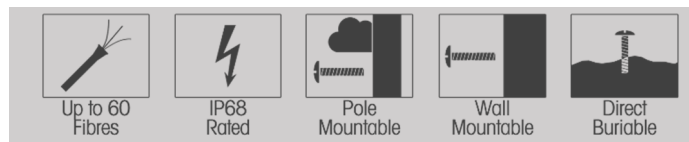

### SPECIFICATIONS

<b>Purpose</b>	Aerial, Direct-Burial, Wall & Pipeline Mounting
<b>Capacity</b>	60
<b>Cable Entries</b>	5
<b>Dimensions (mm)</b>	300 x 220 x 100
<b>Weight (kg)</b>	2.4-2.7
<b>Sealing</b>	Mechanical
<b>Material</b>	Polypropylene
<b>Splicing Per Cassette</b>	12
<b>Cable Diameter (mm)</b>	φ08~15

### ENVIRONMENTAL SPECIFICATIONS

<b>Operation (°C)</b>	-40~+65
<b>Installation (°C)</b>	-40~+65



### ORDERING INFORMATION

<b>Product Code</b>	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER01BXXM	DER01	Mechanical	5	12,24,36,48,60