



FIBRE MANAGEMENT

DOME ENCLOSURE

DER02

PRODUCT SPECIFICATIONS

Linxcom model DER02 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS


- Aerial
- Direct- Burial
- Wall & Pipeline Mounting

FEATURES

- HQ Polypropylene
- Up to 96F
- Adjustable Cassettes

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

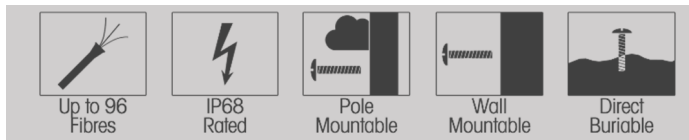


SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	96
Cable Entries	19
Dimensions (mm)	380x245x130
Weight (kg)	4.5-5.0
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	12,24
Cable Diameter (mm)	φ8~17.5

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65

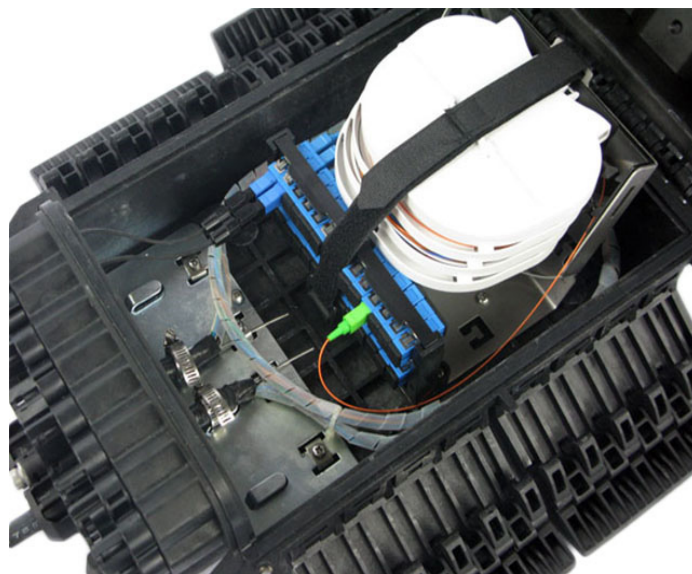

ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER02BXXM	DER02	Mechanical	19	12,24,36,48,60,72,84,96