



FIBRE MANAGEMENT

DOME ENCLOSURE

DER05

PRODUCT SPECIFICATIONS

Linxcom model DER05 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS


- Aerial
- Direct- Burial
- Wall & Pipeline Mounting

FEATURES

- Modified Polymer Plastic
- Up to 144F
- Adjustable Cassettes

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

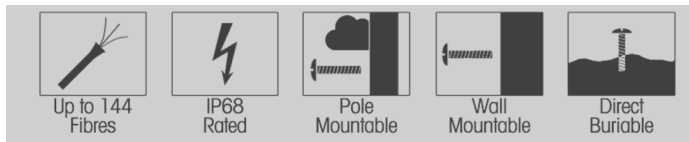

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	144
Cable Entries	5
Dimensions (mm)	450x230
Weight (kg)	3.8-4.2
Sealing	Heat Shrink
Material	Modified Polymer Plastic
Splicing Per Cassette	12,24
Cable Diameter (mm)	φ8~17.5

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65



ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER05BXXH	DER05	Heat Shrink	5	12,24,36,48,60,72,84,96,108,120,132,144