



FIBRE MANAGEMENT

DOME ENCLOSURE

DER07

PRODUCT SPECIFICATIONS

Linxcom model DER07 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




FEATURES

- HQ Polypropylene
- Up to 576F
- Adjustable Cassettes

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

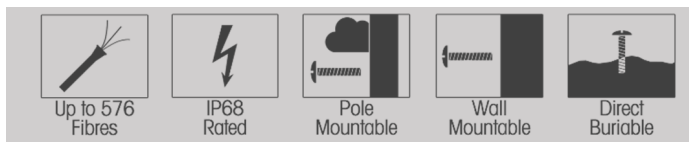

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	576
Cable Entries	7
Dimensions (mm)	480x250
Weight (kg)	5.5-6.5
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	12,24
Cable Diameter (mm)	φ8~17.5

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65



ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER07BXXM	DER07	Mechanical	7	12,24,36,48,60,72,84,96,108,120,132,144,156,168,180,192,204,216,228,240,252,264,276,288,312,336,360,384,408,432,456,480,504,528,552,576