



## FIBRE MANAGEMENT

# DOME ENCLOSURE

# DER12

### PRODUCT SPECIFICATIONS

Linxcom model DER12 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

### APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




### FEATURES

- HQ ABS, PC
- Up to 240F
- Adjustable Cassettes

### BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

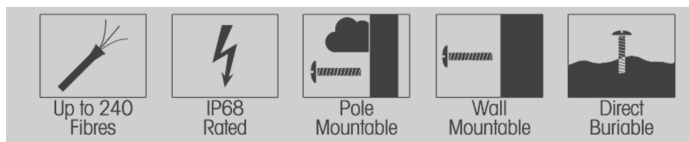

### SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	240
Cable Entries	7
Dimensions (mm)	465x260
Weight (kg)	5.45
Sealing	Heat Shrink
Material	ABS, PC
Splicing Per Cassette	12,24
Cable Diameter (mm)	φ8~17.5

### ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65



### ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER12BXXH	DER12	Heat Shrink	7	12,24,36,48,60,72,84,96,108,120,132,144,156,168,180,192,204,216,228,240