



FIBRE MANAGEMENT

DOME ENCLOSURE

DER13

PRODUCT SPECIFICATIONS

Linxcom model DER13 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




FEATURES

- HQ Polypropylene
- Up to 360F
- Adjustable Cassettes

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

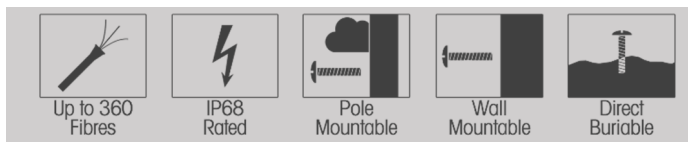

SPECIFICATIONS

| | |
|-----------------------|---|
| Purpose | Aerial, Direct-Burial, Wall & Pipeline Mounting |
| Capacity | 360 |
| Cable Entries | 17 |
| Dimensions (mm) | 500x270 |
| Weight (kg) | 7.5-8.0 |
| Sealing | Heat Shrink |
| Material | Polypropylene |
| Splicing Per Cassette | 12,24 |
| Cable Diameter (mm) | φ8~25.0 |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-------------------|---------|
| Operation (°C) | -40~+65 |
| Installation (°C) | -40~+65 |



ORDERING INFORMATION

| Product Code | Model | Seal | Cable Entries | Core Size/Capacity |
|--------------|-------|-------------|---------------|---|
| LXMDER13BXXH | DER13 | Heat Shrink | 17 | 12,24,36,48,60,72,84,96,108,120,132,144,156,168,180,192,204,216,228,240,252,264,276,288,312,336,360 |