



FIBRE MANAGEMENT

DOME ENCLOSURE

DER14

PRODUCT SPECIFICATIONS

Linxcom model DER14 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS



- Aerial
- Direct- Burial
- Wall & Pipeline Mounting

FEATURES

- HQ Polypropylene
- Up to 144F
- Adjustable Cassettes

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

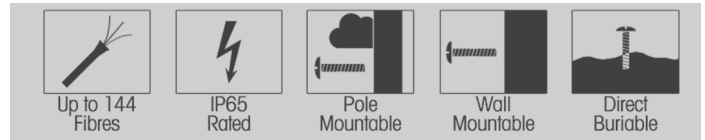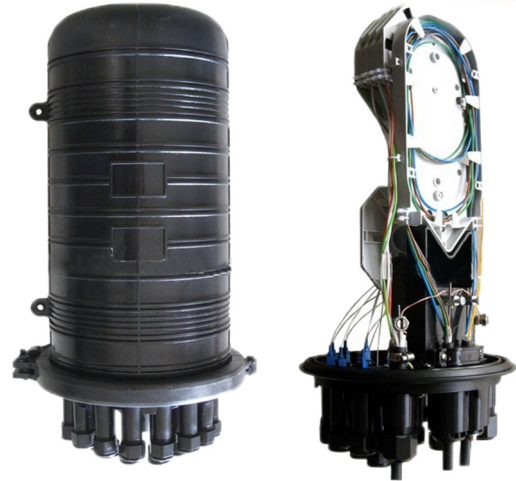

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	144
Cable Entries	20
Dimensions (mm)	526xφ235
Weight (kg)	4.5-5.0
Sealing	Heat Shrink
Material	Polycarbonate
Splicing Per Cassette	6 or 12
Cable Diameter (mm)	φ8~20.0

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+60
Installation (°C)	-40~+60

ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMDER14BXXH	DER14	Heat Shrink	20	6,12,24,36,48,60,72,84,96,108,120,132,144

