



FIBRE MANAGEMENT

DOME ENCLOSURE

DER17

PRODUCT SPECIFICATIONS

Linxcom model DER17 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




FEATURES

- HQ Polypropylene
- Up to 144F
- Removable Adaptor Plate

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

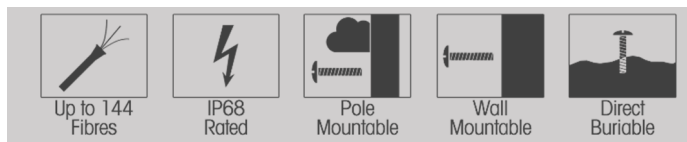

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	144
Cable Entries	5
Dimensions	210x470
Weight (kg)	2.2-2.3
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	12
Cable Diameter(mm)	φ38

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65



ORDERING INFORMATION

Product Code	Model	Seal Type	Cable Entries	Core Size/Capacity
LXMDER17BXXM	DER17	Mechanical	5	12,24,36,48,60,72,84,96,108,120,132,144