



FIBRE OPTIC TOOLS & TEST EQUIPMENT


HEAT CURING OVEN

PRODUCT SPECIFICATIONS

Linxcom heat curing oven is small and easy to use quickly curing epoxy adhesive when terminating fibre optic connectors.

The heat curing oven can hold up to 24 connectors.

24 Port Block for FC, ST, SC and SMA connectors; other holding blocks available.

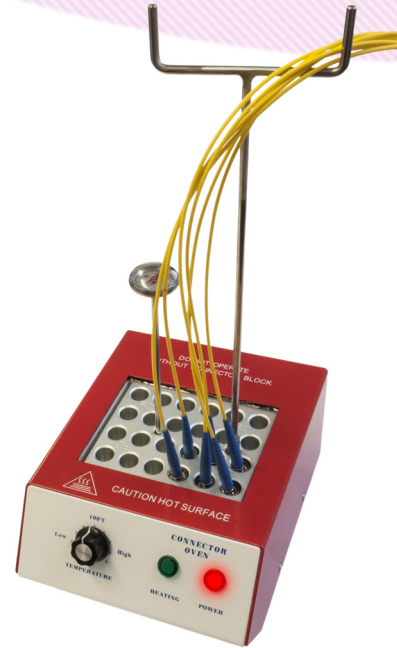

TECHNICAL SPECIFICATIONS

Heating Temperature (°C)	40~200
Input Voltage	100-120 AC/200-240 AC
Power Consumption	200W
Parison Method	PLD
Type	Full- Electric Controlled
Approx. Warm up Time	15min
Connector Type	1.25mm,2.5mm
Capacity	24 Connectors
Dimensions	180x140x90mm
Weight	2kg

ORDERING INFORMATION

Product Code	Description
LXMFOCHO24P	Linxcom Heat Curing Oven- 24 Ports