



FIBRE MANAGEMENT

INLINE ENCLOSURE

PP02

PRODUCT SPECIFICATIONS

Linxcom model PP02- Inline Enclosure provides protection over direct, branch and continual connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Pipeline Mounting




FEATURES

- HQ Polypropylene
- Up to 96F
- Removable Adaptor Plate

BENEFITS

- Sturdy IP 68 & IK 10
- No Special Tools Required
- Protects Fibres in Field

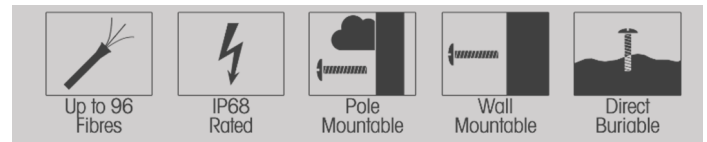


SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	96
Cable Entries	4
Dimensions (mm)	533x209x104
Weight (kg)	3.8-4.2
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	24
Cable Diameter (mm)	φ10~22

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65

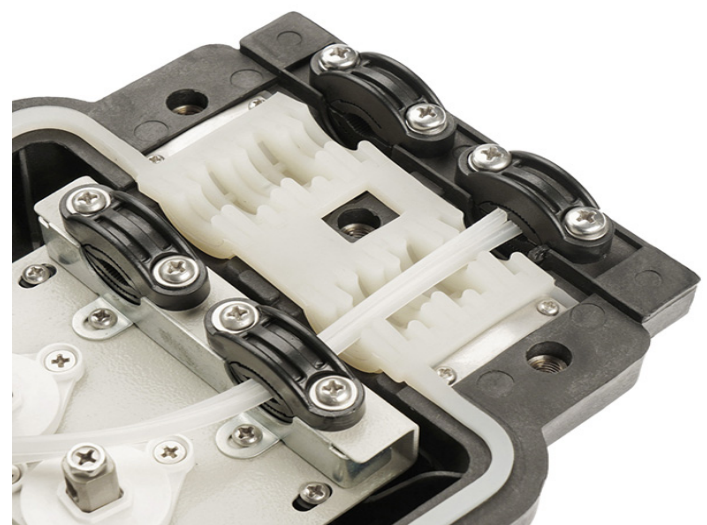

ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMPP02INLXXM	PP02	Mechanical	4	24,48,72,96