


Voice

Category 3 UTP Keystone Jacks

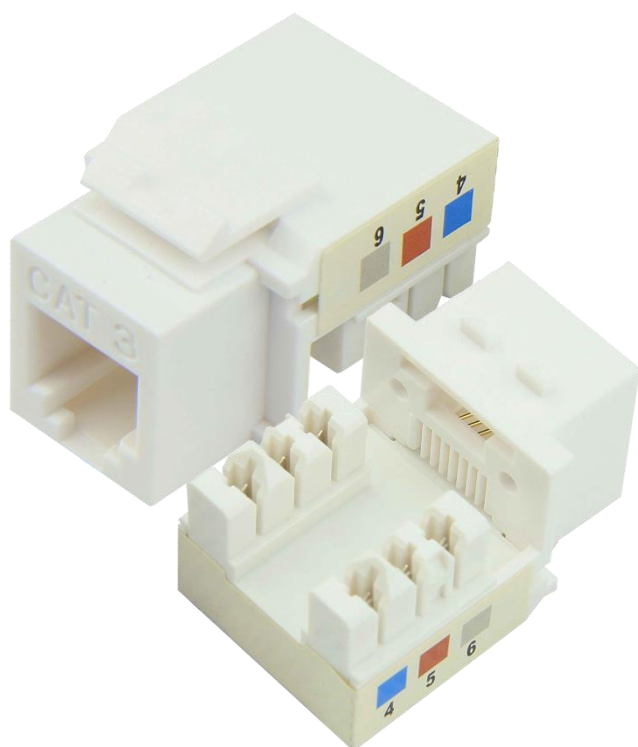

Linxcom CAT3 Keystone jacks comply with the EIA/TIA standard for Category 3 and are available in a choice of 90° or 180° models.

Available in Black, White or combination, all Linxcom keystone jacks come with covers and are individually tested and checked before they leave our factory.

Features & Benefits

- High temperature thermoplastic housing
- Compact design, 8 positions and 8 conductors
- Meets or exceeds the requirement proposed by TIA /EIA 568 B .2 and TIA/EIA Category 3
- Phosphor Bronze contact with 6-50um gold plating
- Available in UTP only
- Low attenuation loss, high return loss
- Accepts 22-26 AWG solid wires with insulation diameter of 0.4-0.6mm

Performance

Operating Temperature	-20°C to +70°C
Insertion Life	700 cycles minimum
IDC Life	200 times minimum
Contact Material	Phosphor Bronze, Gold Plating (0.5mm)
IDC Material	Phosphor Bronze stamp pin (0.35mm)
Housing Material	PC UL94V-0
Conformance	EIA/TIA 568A/B wiring standards, ISO/IEC 11801:2002, EIA/TIA 568B.2.1:2002, RoHS

Ordering Information

Using the available configurations amend/create a part number using the formula below.

Product Code	Description
UTP3KSJWH	CAT3 UTP Keystone Jack - White
UTP3KSJBL	CAT3 UTP Keystone Jack - Black

Example: **UTP3KSJWH** – Category 3 UTP Keystone Jack White

For any queries, please contact the Linxcom team using the details below.