




Fibre Management

Outdoor Terminal Box – Model 6



Lincom Fibre Optic Terminal Boxes are light and compact whilst maintaining adequate fibre storage needs and minimum bend radius. It is especially suited for connecting and protection for fibre cable of FTTx


It can hold 8 SC simplex or 8 LC duplex ports.



Up to 12
Fibres



IP65
Rated



Wall
Mountable


Technical Specifications

Material	Plastic
Ports (SC or FC/ST Simplex)	8
Cable Entries	3
Cable Entry Diameter Range (mm)	6 – 14 Ø
Dimensions (mm)	210 * 175 * 50
Weight (kg)	0.44
Accessories	Cable Ties, Wall Fixings (More Accessories Available)
IP Rating	65

Features

- It is suitable for wall-mounting installation
- It is IP65
- It is suitable for SC adapter's installation and usage
- It is easily to access the box by sliding shackle
- It is applicable for outdoor cables or indoor soft cables
- The maximum capacity is 12 fibres.

Diagram

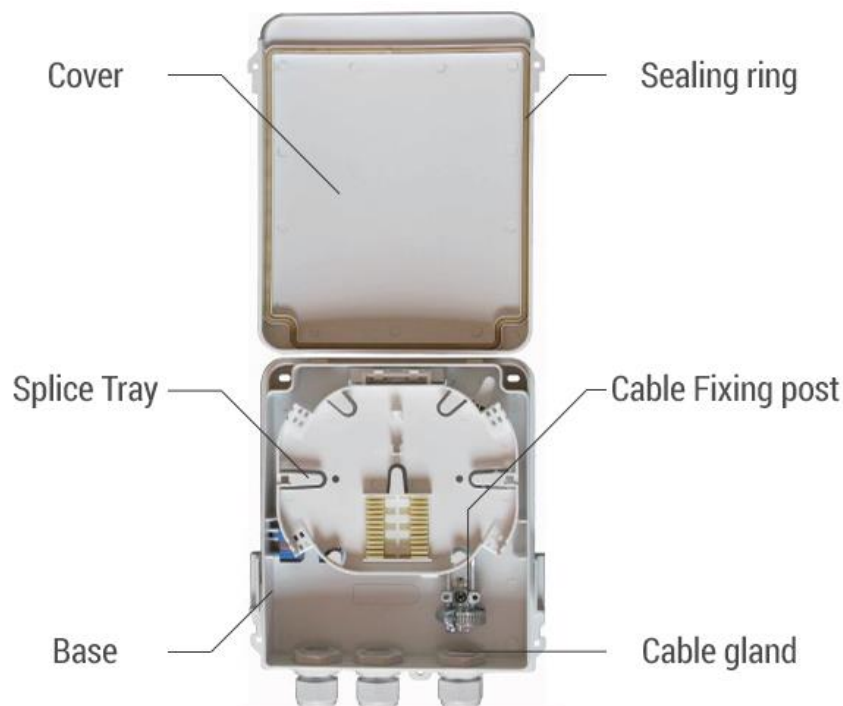



Fibre Management

Outdoor Terminal Box – Model 6

Ordering Information

Using the available configurations amend/create product codes using the formula below.

Box Type		Fibre Type		Simplex / Duplex / Quad	
Outdoor Terminal	OTB	Unloaded	EM	Simplex	S
Box		Singlemode Loaded	SM	Duplex (<i>LC Only</i>)	D
		Multimode Loaded	MM		
		Singlemode APC Loaded	SMA		
OTB	6	EM	SC	S	08
Model		Adapter Type		Port Density	
Model 6	6	ST	ST	8 Ports	08
		SC	SC		
		FC	FC		
		LC (<i>Duplex Only</i>)	LC		

Example: **OTB6EMSCS08** - Unloaded SC Simplex 8 Port Outdoor FTTH Terminal Box Model 6

For any queries, please contact the Linxcom team using the details below.