



FIBRE MANAGEMENT

INLINE ENCLOSURE


PP15

PRODUCT SPECIFICATIONS

Linxcom model PP15- Inline Enclosure provides protection over direct, branch and continual connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS


- Aerial
- Direct- Burial
- Wall & Pipeline Mounting

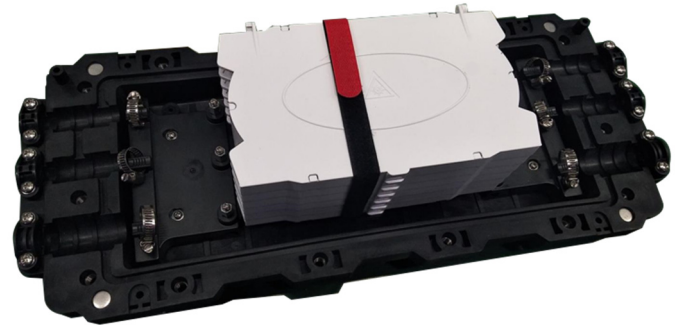

FEATURES

BENEFITS

- | | |
|---------------------------|-----------------------------|
| ▪ HQ Polypropylene | ▪ Sturdy IP 68 & IK 10 |
| ▪ Up to 192~288F | ▪ No Special Tools Required |
| ▪ Removable Adaptor Plate | ▪ Protects Fibres in Field |

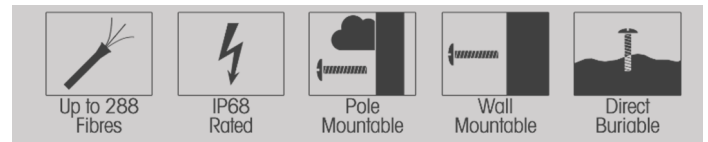

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	192 Model B: 288
Cable Entries	6
Dimensions (mm)	537x215x120 Model B: 537x215x151
Weight (kg)	3.5-4.5
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	12,24,48
Cable Diameter (mm)	φ10~18



ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65

ORDERING INFORMATION

Product Code	Model	Seal	Cable Entries	Core Size/Capacity
LXMPP15INLXXM	PP15	Mechanical	6	12,24,36,48,60,72,84,96~192
LXMPP15BINLXXM	PP15B			12,24,36,48,60,72,84,96~288